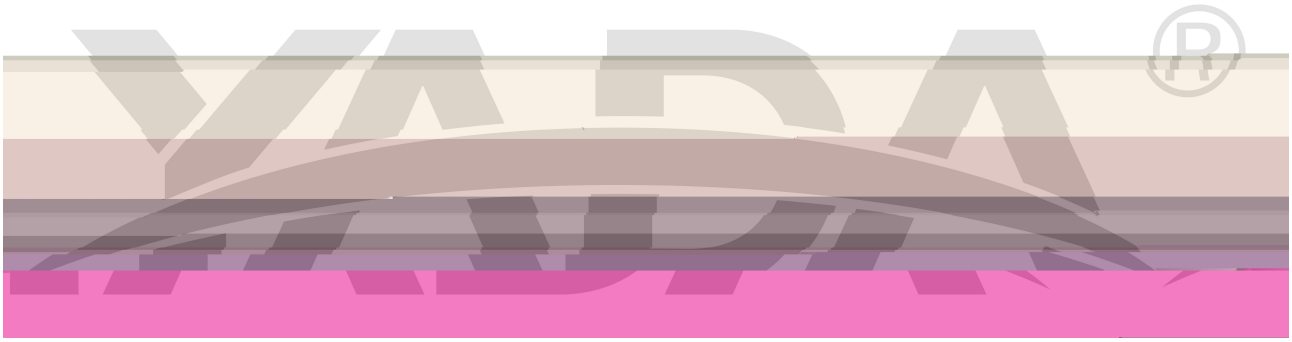

Installation



Screw fixation

Operating temperature: -40 ~65 ; Storage temperature: -40 ~75 ;

Relative humidity: 10%RH~95%RH;

The products are customized according to user’s requirements.

Note: The above pictures are for reference only, the products are subject to the actual product,

Copyright, all rights reserved. Specification subject to change without prior notice.

Addr YADA Industrial Park,Gaopugang ,Heyuan City, Guangdong
TEL 86-762-3493888 FAX 86-762-3493912 POST 517000
http://www. yada.com.cn E-mail: market@yada.com.cn